



QA31


Single Station Smoke Detector

Characteristics

- The QA31 features advanced photoelectric technology for precise detection. When smoke is detected or the manual test button is pressed, the buzzer sounds and LED flash.
- Low-Battery Warning: Unit beeps and LED flash intermittently to indicate battery needs replacing.
- Simple test method: Press test button to hear the alarm sound and confirm the unit is in normal condition.
- Easy installation: Install directly to proper location without any wiring.
- It is equipped with 9VDC battery, and optional 110VAC or 220VAC power plug is available.
- Optional relay output : COM. NO. NC.
- Optional series connection wiring can co-activate up to 15 detectors.

Specifications

Model	QA31
Power	9V battery
Sensitivity Setting	Comply to EN14604
Indicator	Standby: flash every 45 seconds
	Alarm: flash and beep continuously
	Battery abnormal: beeps and flash intermittently
Sound	90dB / M and above
Ambient Temperature	-10°C ~ +55°C
Material	Fire-proof plastic
Dimensions	105mm(Dia.) x 40mm(H)
Weight	About 150g
Color	White
Optional Function	Type 1 : 9V battery
	Type 2 : includes signal transfer COM. N.O. N.C.
	Type 3 : build-in 110VAC or 220VAC plug
	Type 4 : Type 2 + Type 3

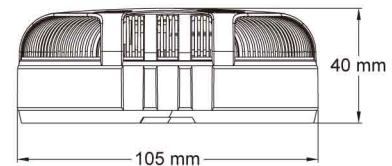

Effective alert area

Building Height	Area Covered
Under 4M	150 M ²
4 ~ 20M	75 M ²

Agent In Thailand : U.P.TECH CORPORATION CO.,LTD

28 Soi Rattanathibet 28 Yaek 2 Bangkrasor Muangnonthaburi Nonthaburi 11000 Thailand

LINE : 0863133492 **Tel** : 02-965-7701-6, 086-355-6781

Email : sales@up-t.com **Email** : admin@up-t.com

Website : www.alarmthailand.com , www.firealarmonline.com

HORING LIH INDUSTRIAL CO., LTD.

4F., No. 18, Lane 327, Chung Shan Road, Sec. 2, Zhonghe District 235, New Taipei City, **Taiwan**

Tel : +886 2 22487599 **Fax** : +886 2 22407752 **Email** : export@horinglih.com **Website** : www.horinglih.com