

Fire Strobe Siren

Emergency LED Strobe Alarm Siren

YA90




Main Feature



- High Intensity LED.
- Low power consumption.
- 3 Selectable tones.
- 3-pin dip switch: 1&2 for tones selection, 3 for flashing frequency (slow or fast).
- 4-pin terminal block, convenient for wiring.
- Easy installation.

YA90

- ① Label
- ② Buzzer window
- ③ LED Flashing
- ④ Base

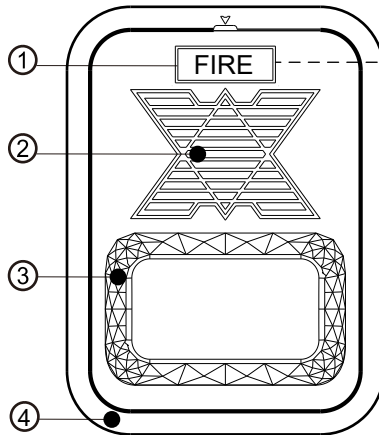

Fire Strobe Siren

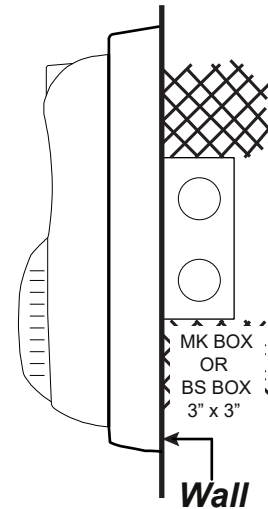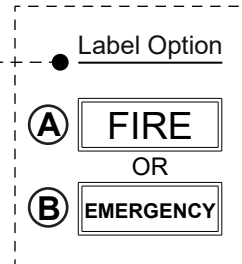

Specification

Model / Product	YA90 Fire Strobe Siren		
Input voltage	DC10-30V		
Alarm Current	≤50mA		
Sound Pressure, Output	85-105 dB/m		
Alarm Output	Sound & Flash		
Alarm Tone	3 selectable tones		
Operating Temperature	- 10°C - 50°C		
Color	Red		
Label Option	Ⓐ FIRE / EMERGENCY Ⓑ		
Case Material	ABS & PC		
Dimension (W x H x D)	100 x 135 x 45 mm.		
Power Supply	12VDC	Alarm Current 13mA	Sound Pressure 83dB/m
	24VDC	Alarm Current 31mA	Sound Pressure 90dB/m

Usafe 2024-24